

WAT-902H2 SUPREME 1/2" High Sensitivity Camera


High sensitivity with compact and lightweight body



Key features

- Min. illumination 0.0003 lx. F1.4
- NIR visibility for poor light condition
- Selectable AGC level and shutter speed for demanding scene conditions
- Video drive iris / DC drive iris auto select

Dimensions

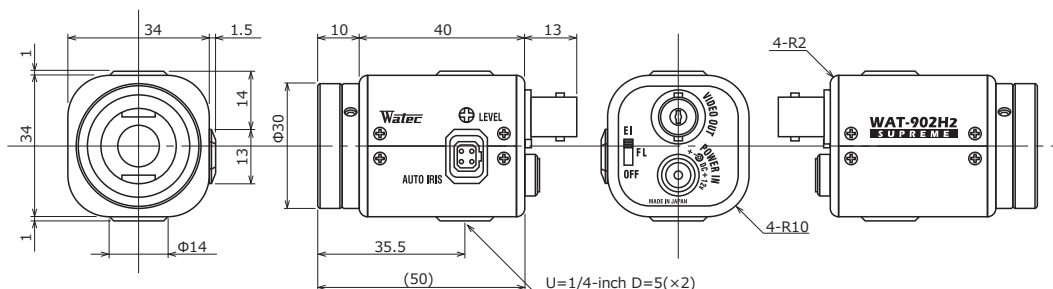


Specifications


Video standard		EIA	CCIR
Pick-up element		1/2 inch interline transfer CCD image sensor	
Number of effective pixels		768(H) × 494(V)	752(H) × 582(V)
Unit cell size		8.4μm(H) × 9.8μm(V)	8.6μm(H) × 8.3μm(V)
Synchronizing system		Internal	
Scanning system		2:1 interlace	
Video output		BNC: Composite video, 1.0 V(p-p), 75Ω (Unbalanced)	
Resolution (H)		More than 570TVL (Center)	
Minimum illumination		0.0003 lx F1.4 (AGC=HI)	
S/N		More than 46dB (AGC=5dB, γ=1.0)	
AE mode	Fixed	1/60, 1/100 sec.	1/50, 1/120 sec.
	EI	1/60 - 1/100000 sec.	1/50 - 1/100000 sec.
AGC		HI: 5 - 50dB / LO: 5 - 32dB	
Gamma characteristics		γ≈0.45	
Lens iris		Video / DC (EIAJ, Auto-select)	
Back light compensation		ON (Center + Under)	
Power supply		DC+12V±10%	
Power consumption		1.98W (165mA)	
Operating temperature		-10 - +40℃	
Storage temperature		-30 - +70℃	
Operating / Storage humidity		95%RH or less (Without condensation)	
Lens mount		CS mount	
Weight		Approx. 90g	
Accessories		WPDC12 (DC plug), AIC-G (Iris plug), Hex. wrench	

Options


C-mount lenses / Mount adaptors

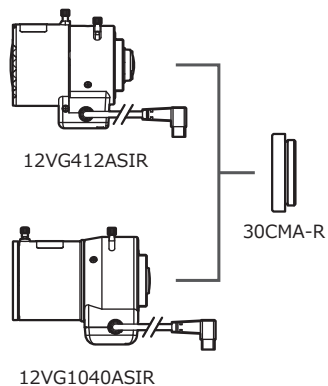


CS-mount lenses



Miniature lenses / Mount adaptors



WAT-902H2 SUPREME




VIDEO OUT (BNC)



POWER IN (DC12V)

Cables




BNC

RCA




※ Not in our lineup

Power supply adaptors

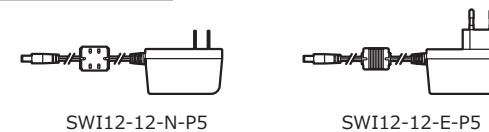

Stands

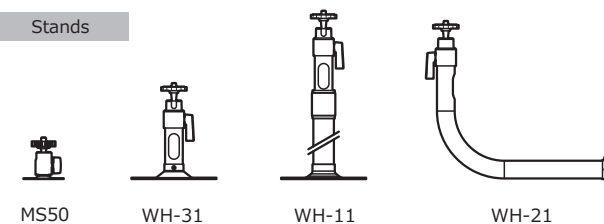

Water resistant camera housing / Mounting brackets

